


Emergency Lighting for Outdoor Stairways

TWO
CODES
ONE
SOLUTION*

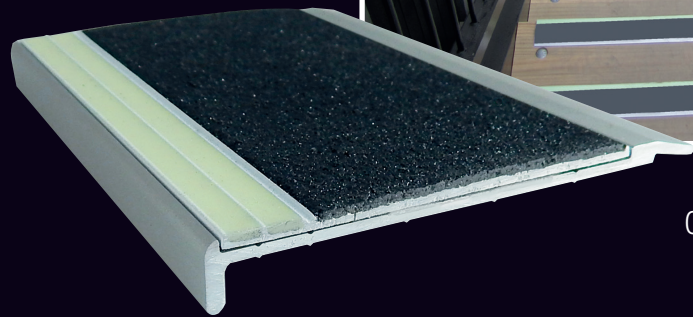

Ecoglo has the solution for both emergency lighting and accessibility. As well as meeting NZBC Clause D1 and AS1428.1, the F14-175 can be used to replace or enhance electrical emergency lighting in outdoor and daylight stairways. You are already installing 50mm of step edge contrast to meet D1, so use the same product to provide an emergency lighting solution.

Both the F14-175 step nosing and E14-075 step edge contrast satisfy the following clauses of the NZBC and AS1428:

D1.3.3 (g) - Have stair treads that can be easily seen;
F6.2 - Specified features must be reasonably

visible by a lighting system, other systems or both during failure of the main lighting;

AS1428.1 (f) - At the nosing, each tread shall have a strip not less than 50mm and not more than 75mm with a minimum luminance contrast of 30% to the background.



COST EFFECTIVE

SUSTAINABLE

RELIABLE

LOW MAINTENANCE

 **ecoglo**[®]

VISIBLY BETTER

Contact us today to solve your emergency lighting problems

www.ecoglo.co.nz

03 348 3781

info@ecoglo.com